



Mono-crystalline Modules CNCB200W-24 CNCB210W-24 CNCB230W-24

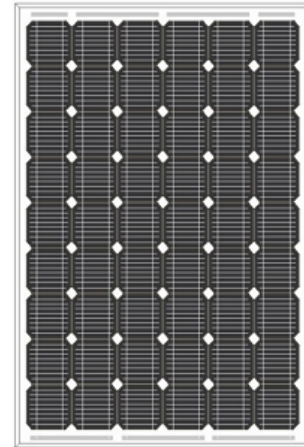

Features


- ⊙ High Efficiency
- ⊙ CE, TUV junction box
- ⊙ Lifetime: 25 years
- ⊙ Warranty: 2 years
- ⊙ 90% power 10 years
- ⊙ 80% power 20 years

Characteristics

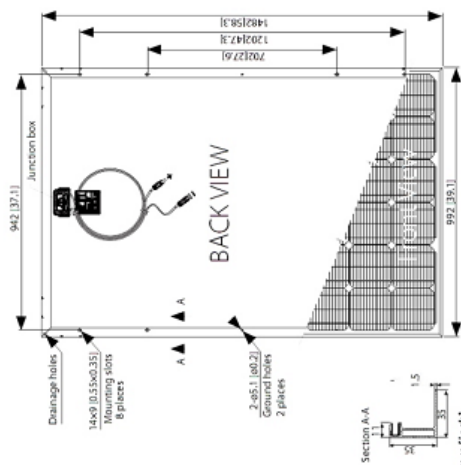

(Mono-crystalline Modules 210W 156*156)

Mono-crystalline Modules 210W

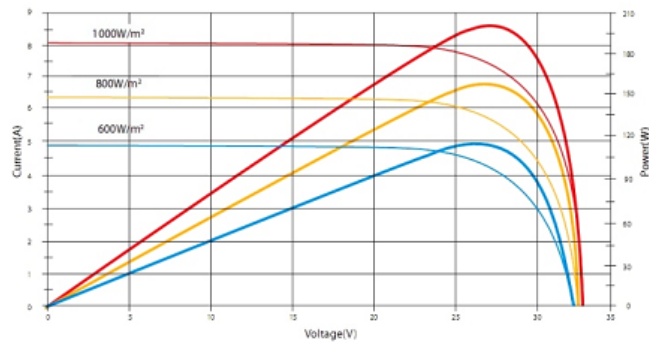

Specification:

Model	CNCB200W-24	CNCB210W-24	CNCB230W-24
Nominal power Pm	200w	210W	230W
Power allowance	± 5%	± 5%	± 5%
Optimized working voltage Vm	26.2V	26.4V	30.3V
Optimized working current Im	7.63A	7.95A	7.92A
Open circuit voltage Voc	33.6V	33.6V	37.0V
Short circuit current Isc	8.1A	8.33A	8.31A
Module efficiency	12%	12%	13%
Withstanding voltage	1000		
Dimension of module (mm)	1482×992×50		
Net weight (kg)	19		
Packing (pcs/carton)	2		
Dimension of package (mm)	1532×920×150		
Volume (m3)	0.21		
Gross weight (kg/ carton)	40		
Dimension of pallet (mm)	1562×1080×1950		
Quantity in a 40' container	20carton/pallet×13 pallet =260carton (520pcs)		
Time returnable & replaceable	2 year		
Power attenuation	10year≤10% 20 year≤20%		