



Mono-crystalline Modules CNCB240W-24 CNCB250W-24

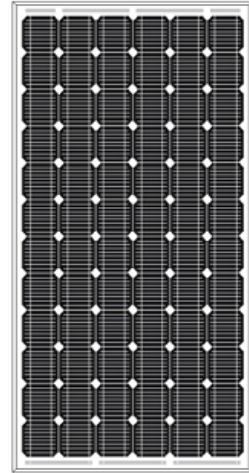

Features


- ⊙ High Efficiency
- ⊙ CE, TUV junction box
- ⊙ Lifetime: 25 years
- ⊙ Warranty: 2 years
- ⊙ 90% power 10 years
- ⊙ 80% power 20 years

Characteristics

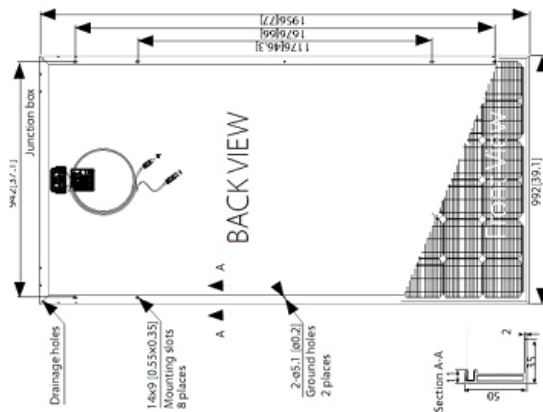

(Mono-crystalline Modules 250W 156*156)

Mono-crystalline Modules 250W

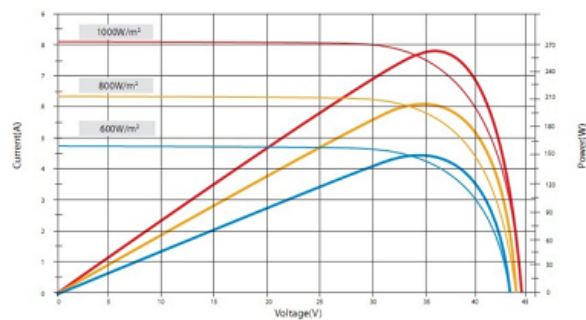

Specification:

| Model | CNC240W-24 | CNC250W-24 |
|---------------------------------|--|------------|
| Nominal power (Pm) | 240W | 250W |
| Power allowance | ±5% | ±5% |
| Optimized working voltage (Vm) | 34.3V | 34.4V |
| Optimized working current (Im) | 7.00A | 7.26A |
| Open circuit voltage (Voc) | 43.2V | 43.2V |
| Short circuit current (Isc) | 7.7A | 7.82A |
| Module efficiency | 12.40% | 12.90% |
| Withstanding voltage | 1000DC | |
| Dimension of module (L) | 1956×992×50 | |
| Net weight (Kg) | 23 | |
| Packing (pcs/Mcarton) | 2 | |
| Dimension of package (L) | 2006×1036×130 | |
| Volume (m3) | 0.27 | |
| Gross weight (Kg/carton) | 55 | |
| Dimension of pallet | 2036×1080×1970 | |
| Quantity in a 40' container | 14carton/pallet×11pallet=154carton(308pcs) | |
| Time returnable and replaceable | 2year | |
| Power attenuation | 10year≤10%20year≤20% | |