


## MONO CRYSTALLINE MODULES CNCB 5 ET 10 W


### Features

- ⊙ High Efficiency
- ⊙ 12V DC standard output
- ⊙ CE,TUV junction box
- ⊙ Lifetime:25 years
- ⊙ Warranty:2 years
- ⊙ 90% power 10 years
- ⊙ 80% power 20 years

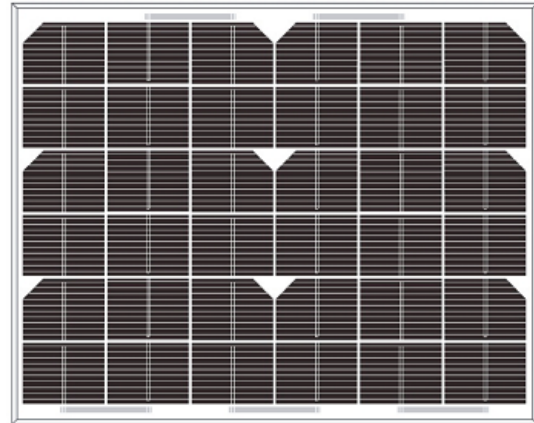


(Mono-crystalline Modules 10W)

### Characteristics

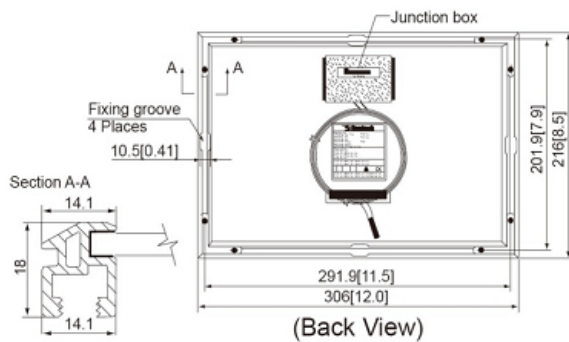

### Characteristics

Module IV Graph 10W

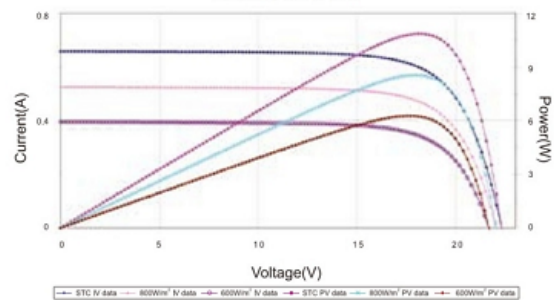

### Specification:

Model	CNCB5W-12	CNCB10W-12
Nominal power Pm	5W	10W
Power allowance	±10%	±10%
Optimized working voltage Vm	16.7V	16.7V
Optimized working current Im	0.3A	0.60A
Open circuit voltage Voc	21.3V	21.3V
Short circuit current Isc	0.33A	0.68A
Module efficiency	7.60%	8.80%
Withstanding voltage	DC715V	DC715V
Dimension of module (mm)	216*306*18	310*368*18
Net weight (kg)	0.8	1.5
Quantity of each carton(pcs)	20	20
Packing ( inside )	316*230*28mm	320*382*28mm
Dimension of package (outside)	330*620*245mm	335*620*384mm
Volume (m3)	0.047	0.077
Gross weight (kg/ carton)	18	35
Dimension of pallet (mm)	1280*1010*1825	1200*800*1825
Quantity in a 20' container	30carton/ pallet×8 pallet	20carton/ pallet×8 pallet
Time returnable and replaceable	2 year	2 year
Power attenuation	10year≤10%,20year≤20%	10 year≤10%,20 year≤20%