
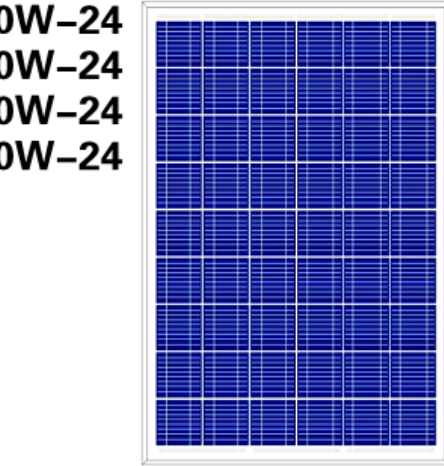


Poly-crystalline Modules CNCC200W-24 CNCC210W-24 CNCC220W-24 CNCC230W-24

Features


- High Efficiency
- CE, TUV junction box
- Lifetime: 25 years
- Warranty: 2 years
- 90% power 10 years
- 80% power 20 years

Characteristics

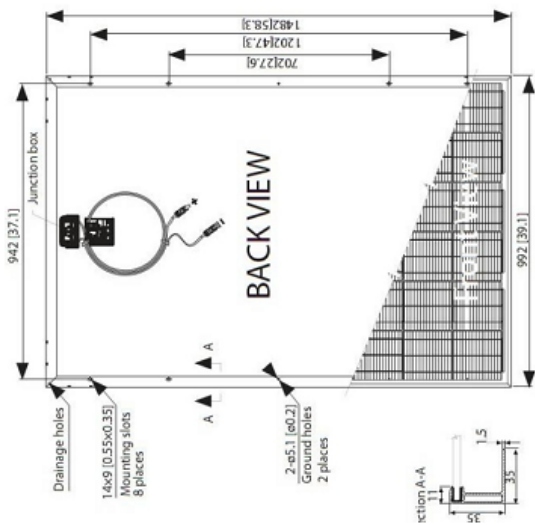

(Poly-crystalline Modules 200W 156*156)

Poly-crystalline Modules 200W

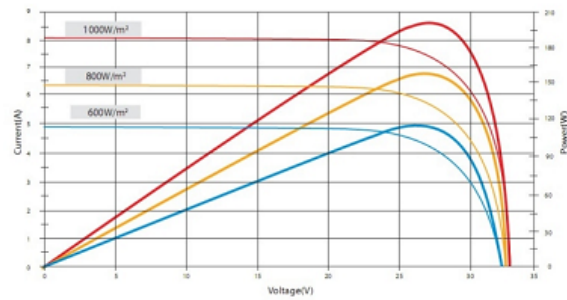

Specification:

Model	CNCC200W-24	CNCC210W-24	CNCC220W-24	CNCC230W-24
Nominal power (Pm)	200W	210W	220W	230W
Power allowance	±5%	±5%	±5%	±5%
Optimized working voltage (Vm)	26.2V	26.4V	29.5V	29.8V
Optimized working current (Im)	7.63A	7.24A	7.45A	7.73A
Open circuit voltage (Voc)	33.4V	33.6V	37.0V	37.0V
Short circuit current (Isc)	8.12A	8.33A	8.1A	8.22A
Module efficiency	12%	12%	13%	13%
Withstanding voltage	1000			
Dimension of module (L)	1482×992×50			
Net weight (Kg)	19			
Packing (pcs/Mcarton)	2			
Dimension of package (L)	1532×920×150			
Volume (m3)	0.21			
Gross weight (Kg/carton)	40			
Dimension of pallet	1562×1080×1950			
Quantity in a 40' container	20carton/pallet×13 pallet =260carton (520pcs)			
Time returnable & replaceable	2 year			
Power attenuation	10year≤10% 20 year≤20%			