



## Poly-crystalline Modules CNCC240W-24 CNCC250W-24

### Features

- High Efficiency
- CE, TUV junction box
- Lifetime: 25 years
- Warranty: 2 years
- 90% power 10 years
- 80% power 20 years

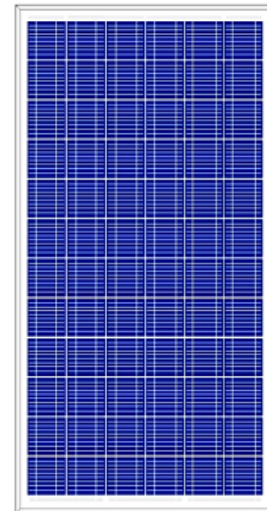


### Characteristics

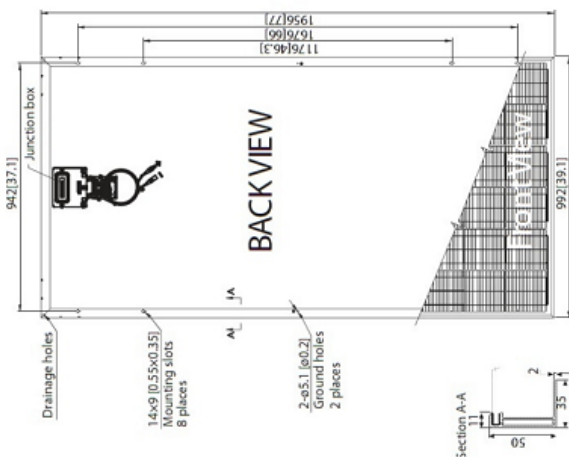

(Poly-crystalline Modules 250W 156\*156)

Poly-crystalline Modules 250W

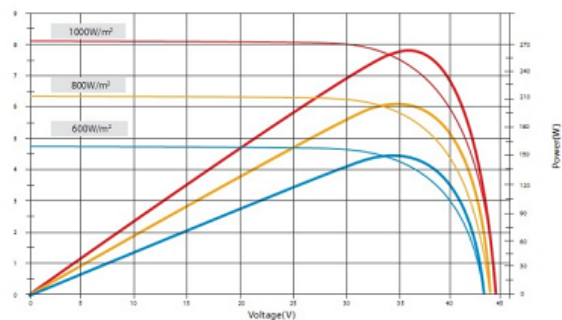

### Specification:

Model	CNCC240W-24	CNCC250W-24
Nominal power (Pm)	240 W	250W
Power allowance	±5%	±5%
Optimized working voltage (Vm)	34.2 V	34.3V
Optimized working current (Im)	7.02A	7.28A
Open circuit voltage (Voc)	43.2	43.2V
Short circuit current (Isc)	7.7A	7.82A
Module efficiency	12.40%	12.90%
Withstanding voltage	1000DC	
Dimension of module (L)	1956×992×50	
Net weight (Kg)	23	
Packing ( pcs/Mcarton)	2	
Dimension of package (L)	2006×1036×130	
Volume (m3)	0.27	
Gross weight ( Kg/carton)	55	
Dimension of pallet	2036×1080×1970	
Quantity in a 40' container	14carton/pallet×11pallet= 154carton(308pcs)	
Time returnable and replaceable	2year	
Power attenuation	10year≤10%20year≤20%	