
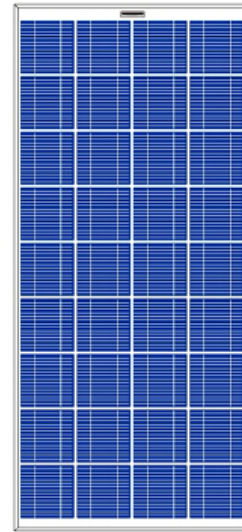


Poly-crystalline Modules CNCC80W-12 CNCC85W-12 CNCC90W-12

Features


- High Efficiency
- 12V DC standard output
- CE, TUV junction box
- Lifetime: 25 years
- Warranty: 2 years
- 90% power 10 years
- 80% power 20 years

Characteristics

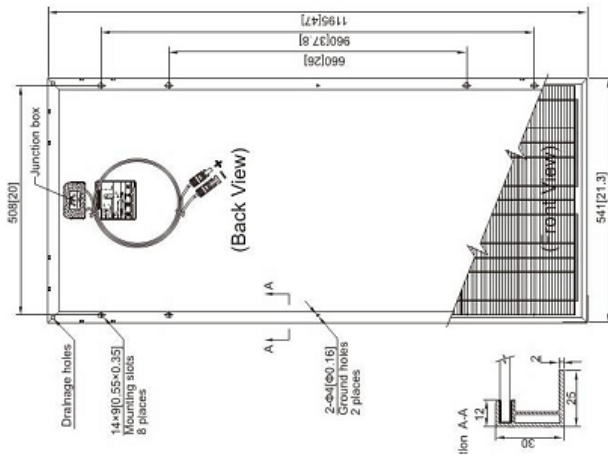

(Poly-crystalline Modules 85W 125*125)

Characteristics

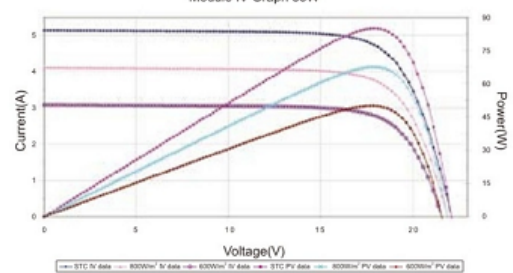

Specification:

Model	CNCC80W-12	CNCC85W-12	CNCC90W-12
Nominal power Pm	80W	85 W	90 W
Power allowance	±5%	±5%	±5%
Optimized working voltage Vm	17.2V	17.5V	17.6V
Optimized working current Im	4.65A	4.86A	5.11A
Open circuit voltage Voc	21.8V	22.2V	22.4V
Short circuit current Isc	5.07A	5.29A	5.51A
Module efficiency	12.40%	13.10%	13.90%
Withstanding voltage	DC715V		
Dimension of module (mm)	1196*541*30		
Net weight (kg)	8		
Packing (pcs/carton)	2		
Dimension of package (mm)	1246*585*100		
Volume (m3)	0.073		
Gross weight (kg/ carton)	19		
Dimension of pallet (mm)	1280*740*2050		
Quantity in a 20' container	22carton/pallet× 12 pallet = 264 carton (528pcs)		
Time returnable and replaceable	2 year		
Power attenuation	10year≤ 10% 20 year≤ 20%		